



输出端output

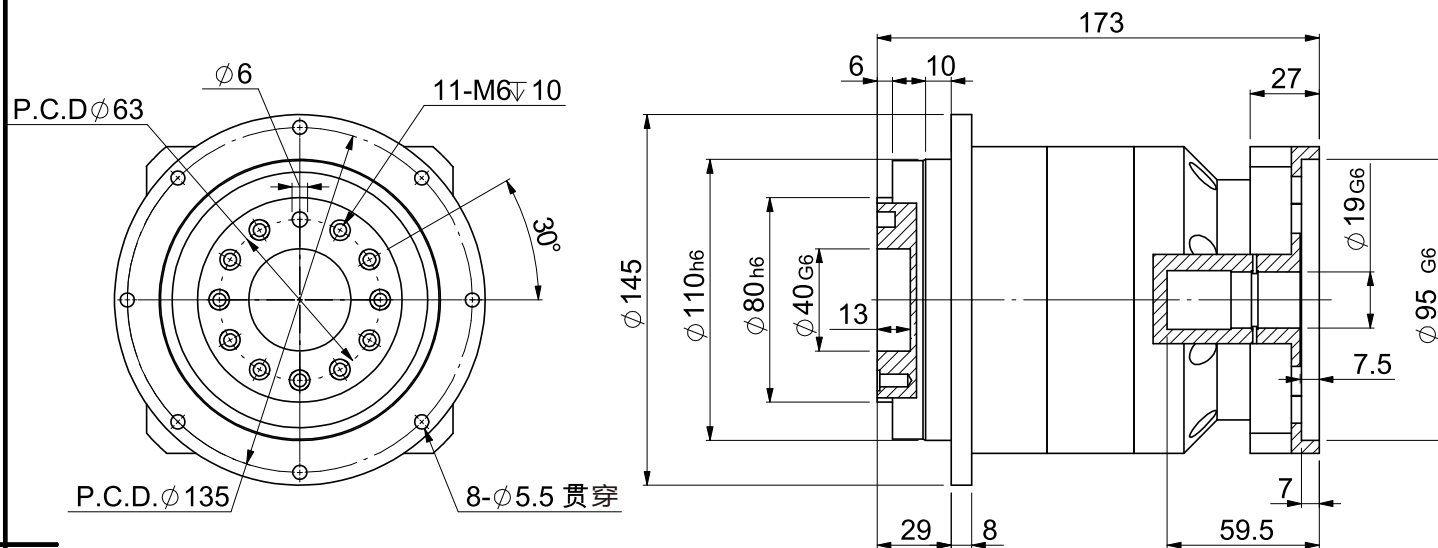

输入端input

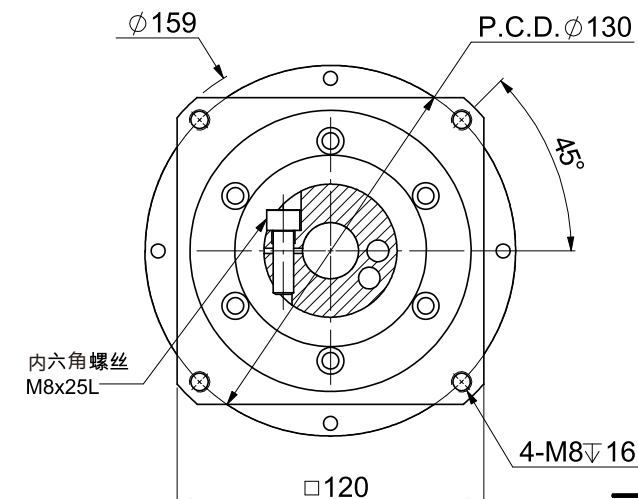

名称 Title	精密行星减速机 Precision planetary reducer		客户P0/项目物料编码 Customer project material code			PLX120-25-S2-P0	25	350	0.47			
最大输出扭矩 Max.Out put torque	1.5倍额定扭矩 1.5 times rated torque	润滑方式 Lubricating method	长效润滑 Synthetic grease	请确认签名/日期 Please confirm signature/date		PLX120-28-S2-P0	28	300	0.47			
额定输入转速 Rated input speed	3000rpm	最大输入转速 Max. input speed	6000rpm			PLX120-30-S2-P0	30	/	/			
容许径向力 Max. radial force	8200N	容许轴向力 Max. axial force	2050N			PLX120-35-S2-P0	35	350	0.47			
效率 Efficiency	90%	使用温度 Operating temperature	-10℃~ +90℃			版本 Edition Version	22A/01		PLX120-40-S2-P0	40	350	0.47
传标准侧隙 Standard backlash	≤5arcmin	使用寿命 Srvice life	20000h	阶段标记 Stage Mark					PLX120-50-S2-P0	50	350	0.44
安装方式 Mounting position	任意 Any	防护等级 Protection class	IP65	第一角画法 First Angle projection				PLX120-70-S2-P0	70	350	0.44	
噪音值 Noise level	≤65dB	重量 ±3% Weight ±3%	9.5Kg	恩坦斯特® andantex		PLX120-100-S2-P0	100	220	0.44			
电机尺寸 Motor dimensions	Ø19*55/Ø95*5/4-Ø9-Ø130			Email:info@ngt-china.com			备注					

规格尺寸如有变动，恕不另行通知 (Above specification are for standard reeducer, No standard reducer only for reference)