Customer		Contract No.	
Motor dimensions			

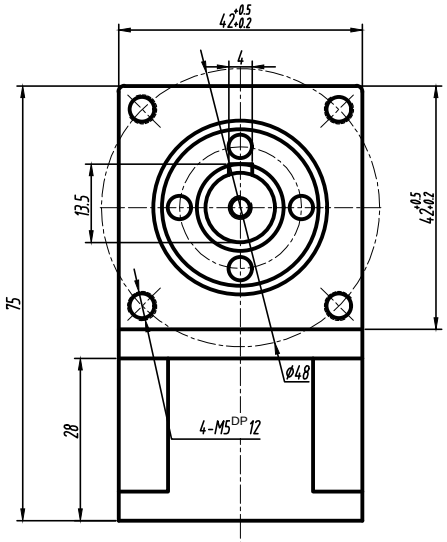

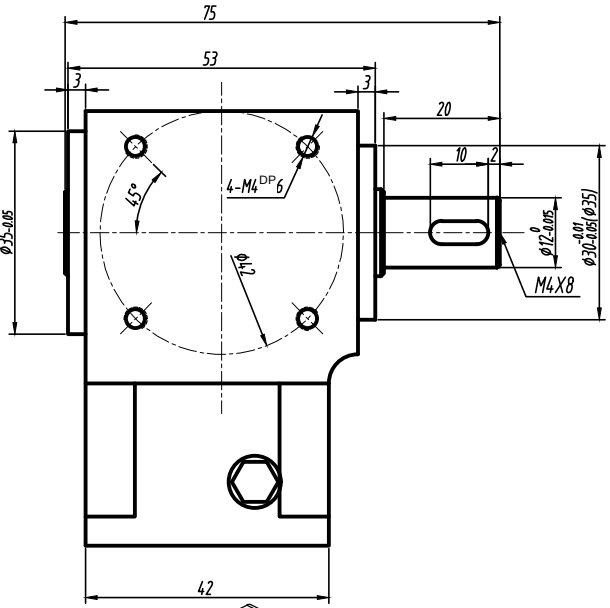

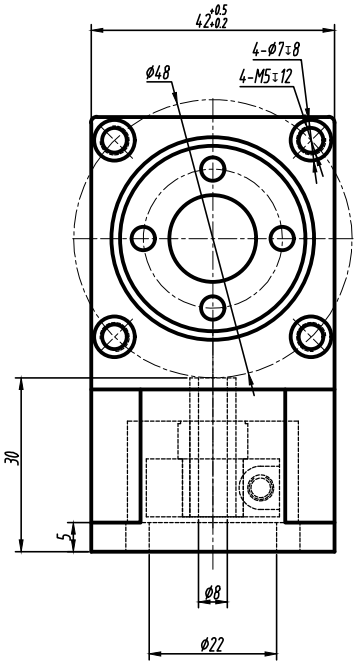

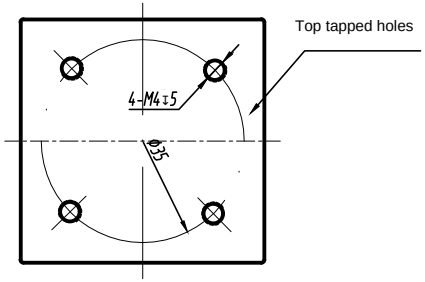

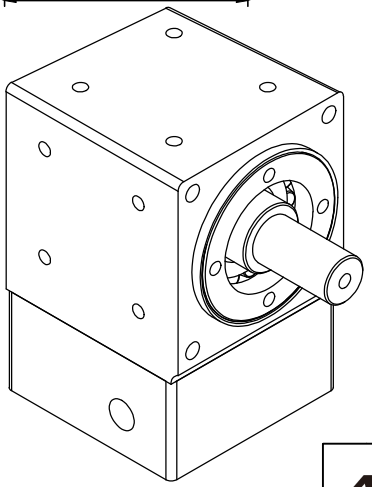

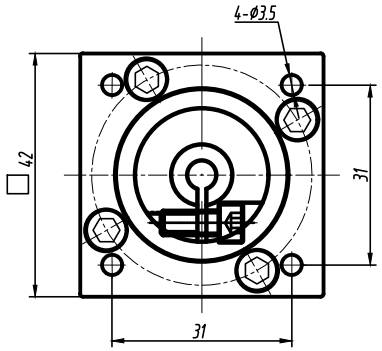

Specifications					
Rated torque	Nm	(A)	Rated speed	rpm	2000
Max. torque	Nm	36	Max. speed	rpm	3000
Backlash	arcmin	P0≤1 P1≤3 P2≤5	Ambient temp.	°C	-20~+90
Radial load	N	350	Lubrication	Lup	Long-life
Axial load	N	160	IP rating	PC	IP65
Inertia	Kg.cm²	0.03	Mounting	MP	Any position
Efficiency		97	Weight	Kg	0.49
Service life	h	≥20000	Noise	Db	≤62

Ratio ( )	Model	Rated torque A)
	PVFD040-L1-2	23
	PVFD040-L1-3	20
	PVFD040-L1-5	18

ANDANTEX	RIGHT-ANGLE GEARBOX
PVFD040	PVFD040-L1-()-P()

Outline dimensions | Units: mm | Scale: 1:1 | Sheet: 1/1