


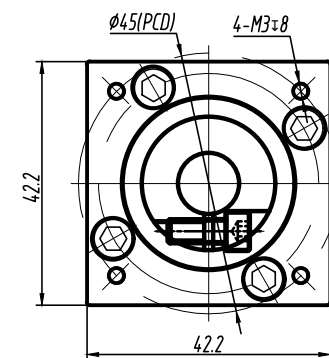

Specifications						Ratio ()	Model	Rated torque A
Rated torque	Nm	(A)	Rated speed	rpm	2000			
Max. torque	Nm	2x	Max. speed	rpm	3000			
Backlash	arcmin	P0≤3 P1≤5 P2≤8	Ambient temp.	° c	-20~+90			
Radial load	N	350	Lubrication	Lup	Long-life			
Axial load	N	160	IP rating	PC	IP65			
Inertia	Kg. cm ²	0. 03	Mounting	MP	Any position			
Efficiency		97	Weight	Kg	1. 00			
Service life	h	≥20000	Noise	Db	≤62			

Outline dimensions	Units: mm	Scale: 1:1	Sheet: 1/1
--------------------	-----------	------------	------------