

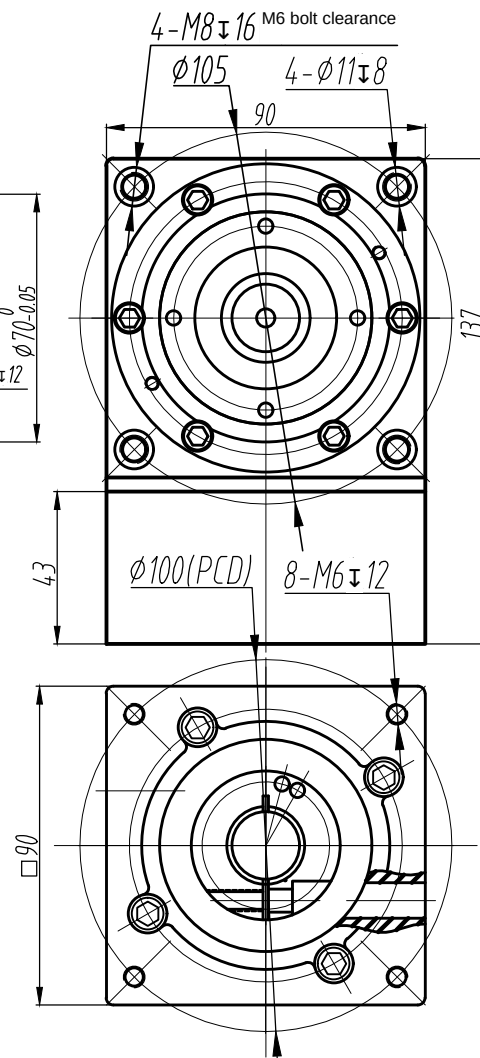
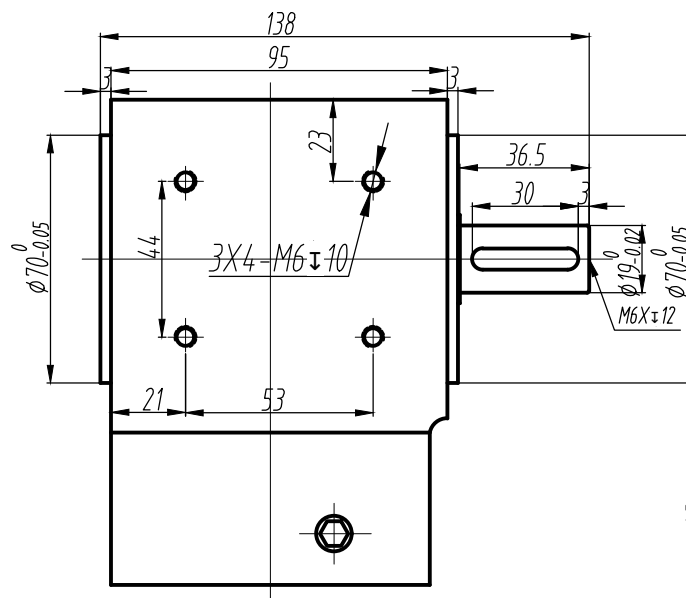


Customer		Contract No.	
Motor dimensions			

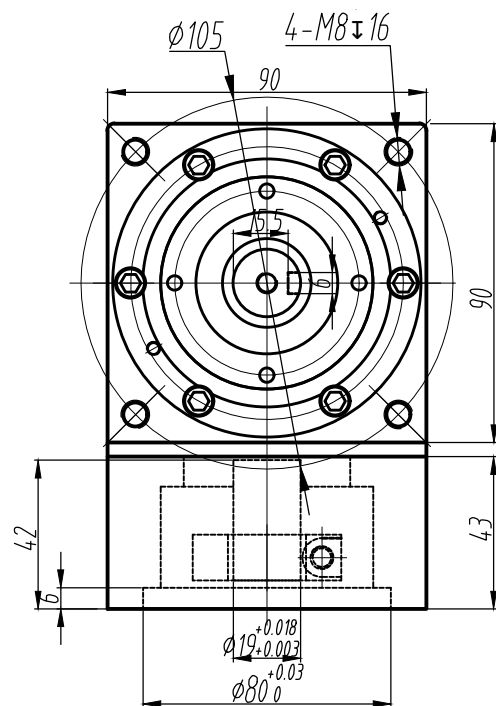

Specifications					
Rated torque	Nm	(A)	Rated speed	rpm	2000
Max. torque	Nm	2x	Max. speed	rpm	3000
Backlash	arcmin	$P0 \leq 1$ $P1 \leq 3$ $P2 \leq 5$	Ambient temp.	° C	-20~+90
Radial load	N	1050	Lubrication	Lup	Long-life
Axial load	N	550	IP rating	PC	IP65
Inertia	Kg. cm ²	0.09	Mounting	MP	Any position
Efficiency		97	Weight	Kg	3.93
Service life	h	≥20000	Noise	Db	≤62

Ratio ()	Model	Rated torque (A)
	PVFD090-L1-2	60
	PVFD090-L1-3	55
	PVFD090-L1-5	50

ANDANTE	RIGHT-ANGLE GEARBOX
PVFD090	PVFD090-L1-()-(P0)
Outline dimensions Units: mm Scale: 1:1 Sheet: 1/1	