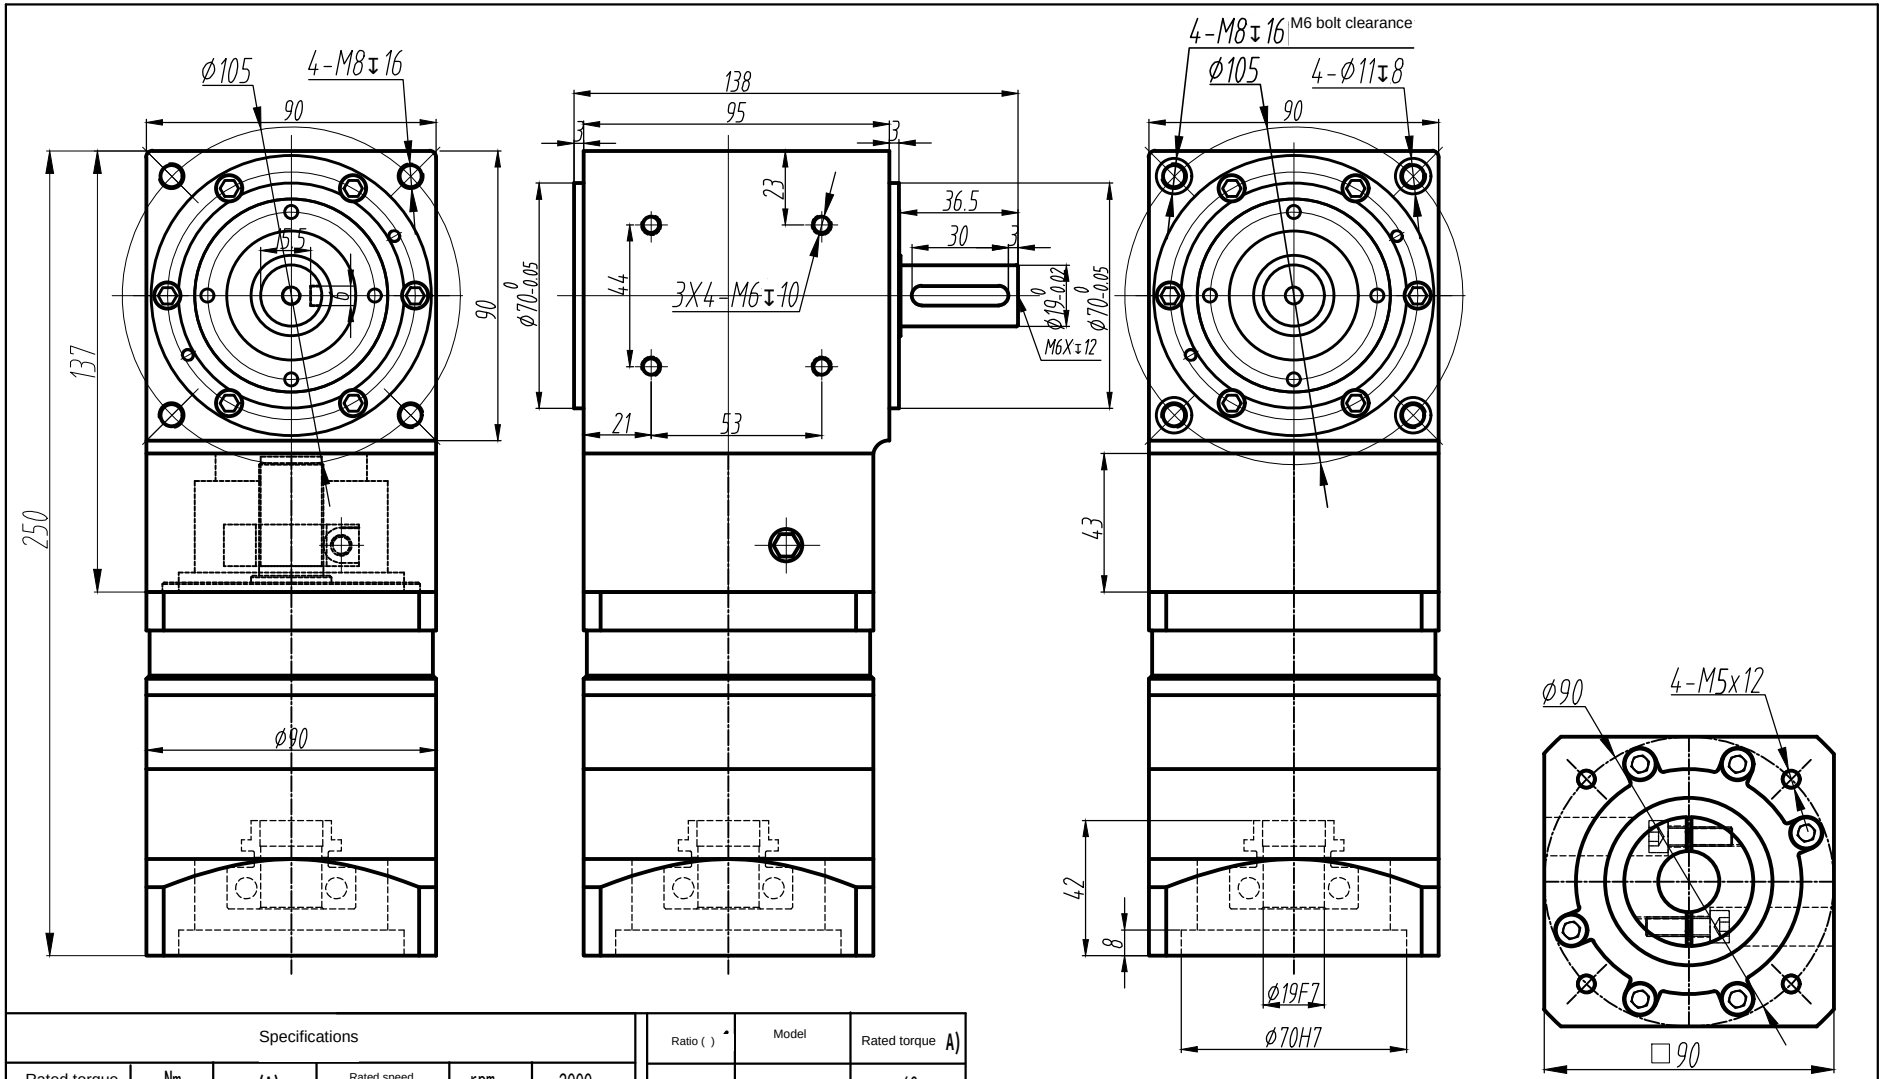

Specifications					
Rated torque	Nm	(A)	Rated speed	rpm	2000
Max. torque	Nm	2x	Max. speed	rpm	3000
Backlash	arcmin	P0≤3 P1≤5 P2≤8	Ambient temp.	° c	-20~+90
Radial load	N	1050	Lubrication	Lup	Long-life
Axial load	N	550	IP rating	PC	IP65
Inertia	Kg. cm²	0. 08	Mounting	MP	Any position
Efficiency		95	Weight	Kg	6. 68
Service life	h	≥20000	Noise	Db	≤62

Ratio ( )	Model	Rated torque A)
	PVFD090-L2-10	60
	H090-L2-12	55
	PVFD090-L2-15	55
	PVFD090-L2-20	60
	PVFD090-L2-25	50
	PVFD090-L2-30	55
	PVFD090-L2-35	55
	PVFD090-L2-50	50

ANDANTEX	RIGHT-ANGLE GEARBOX
PVFD090	PVFD090-L2-()-P()
Outline dimensions | Units: mm | Scale: 1:1 | Sheet: 1/1	