


Customer		Contract No.	
Motor dimensions			

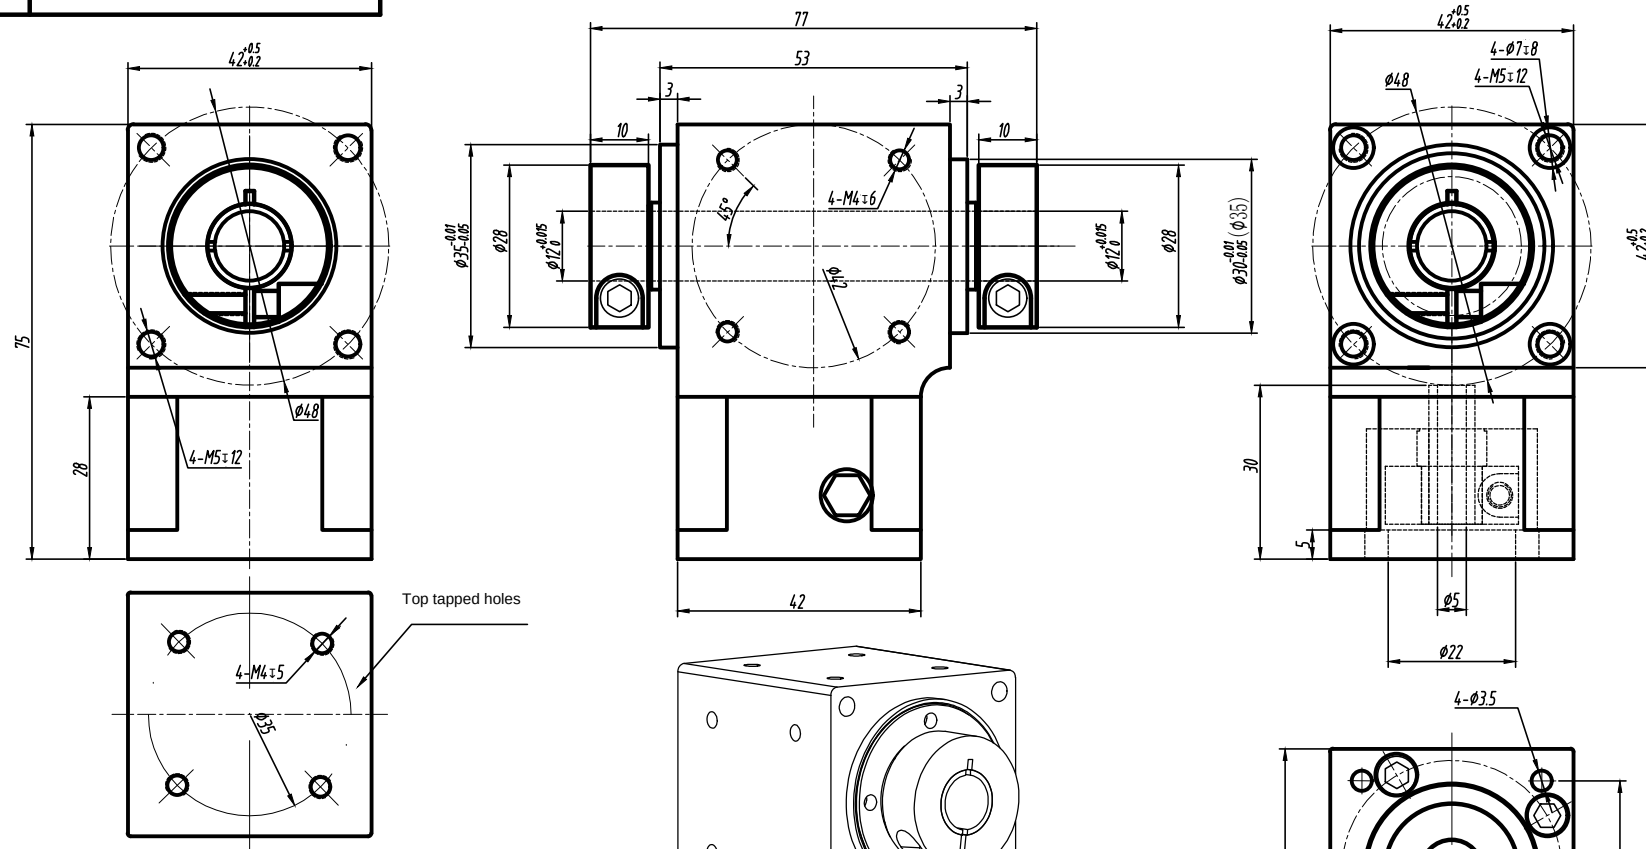

Specifications

Rated torque	Nm	(A)	Rated speed	rpm	2000
Max. torque	Nm	36	Max. speed	rpm	3000
Backlash	arcmin	$P0 \leq 1$ $P1 \leq 3$ $P2 \leq 5$	Ambient temp.	° C	-20~+90
Radial load	N	350	Lubrication	Lup	Long-life
Axial load	N	160	IP rating	PC	IP65
Inertia	Kg. cm ²	0.03	Mounting	MP	Any position
Efficiency		97	Weight	Kg	0.49
Service life	h	≥20000	Noise	Db	≤62

Ratio ()	Model	Rated torque (A)
	PVFG040-L1-2	23
	PVFG040-L1-3	20
	PVFG040-L1-5	18

ANDANTE

RIGHT-ANGLE GEARBOX

PVFG040

PVFG040-L1-()-P()

Outline dimensions | Units: mm | Scale: 1:1 | Sheet: 1/1