

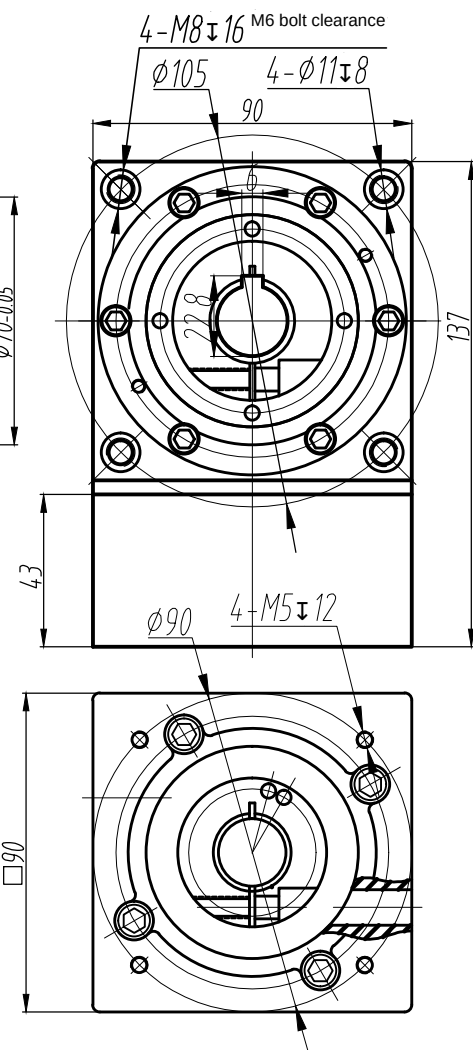
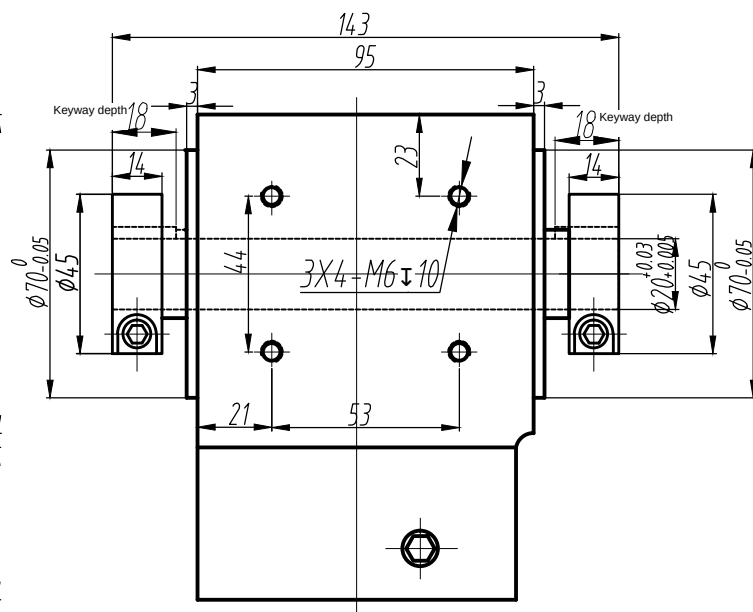


Customer		Contract No.	
Motor dimensions			

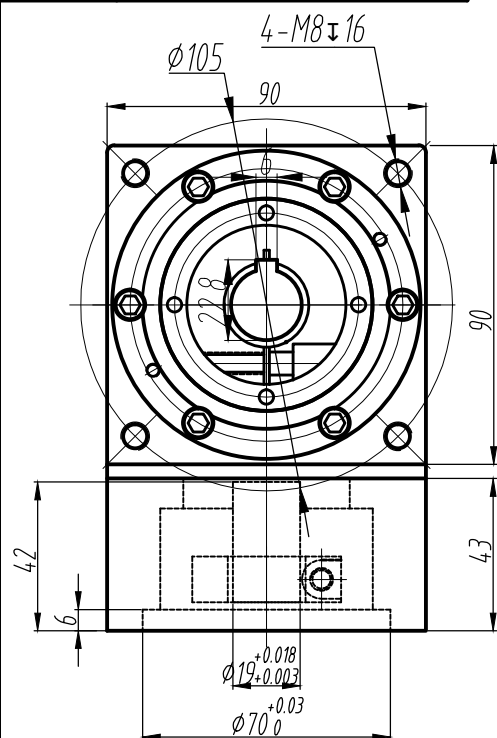

Specifications					
Rated torque	Nm	(A)	Rated speed	rpm	2000
Max. torque	Nm	2x	Max. speed	rpm	3000
Backlash	arcmin	P0≤1 P1≤3 P2≤5	Ambient temp.	° C	-20~+90
Radial load	N	1050	Lubrication	Lup	Long-life
Axial load	N	550	IP rating	PC	IP65
Inertia	Kg. cm ²	0.09	Mounting	MP	Any position
Efficiency		97	Weight	Kg	3.93
Service life	h	≥20000	Noise	Db	≤62

Ratio ()	Model	Rated torque (A)
	PVFG090-L1-2	60
	PVFG090-L1-3	55
	PVFG090-L1-5	50

ANDANTE	RIGHT-ANGLE GEARBOX
PVFGB090	PVFG090-L1-()-P()
Outline dimensions Units: mm Scale: 1:1 Sheet: 1/1	