




Customer		Contract No.	
Motor dimensions			

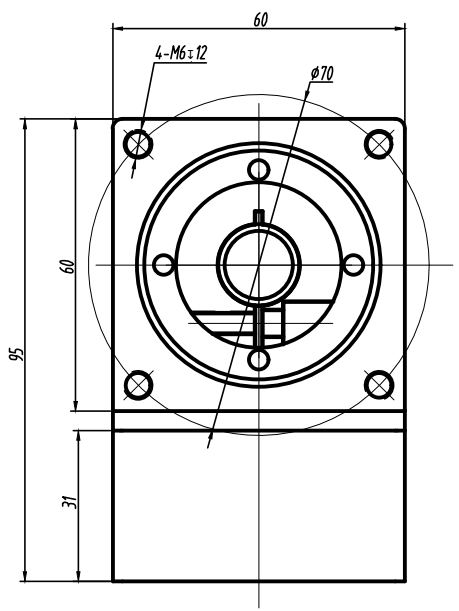

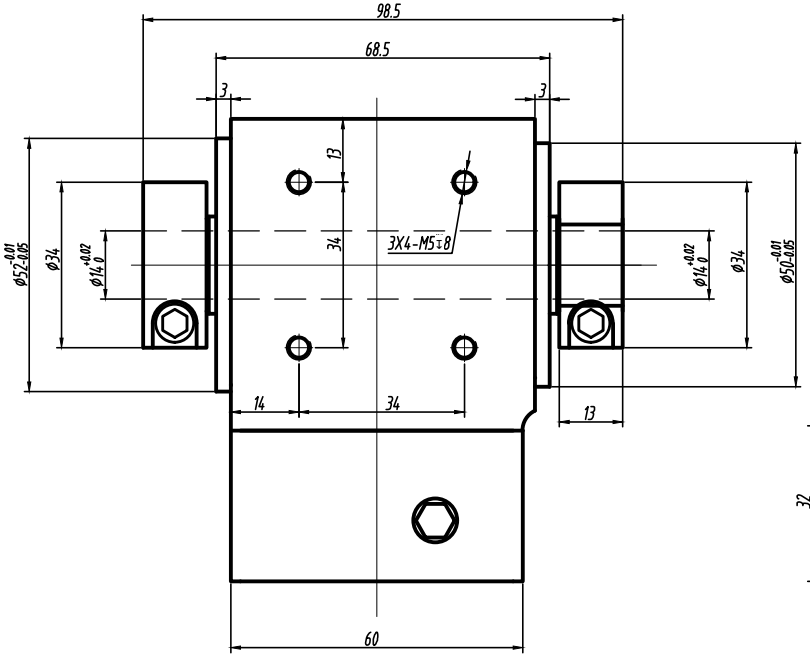

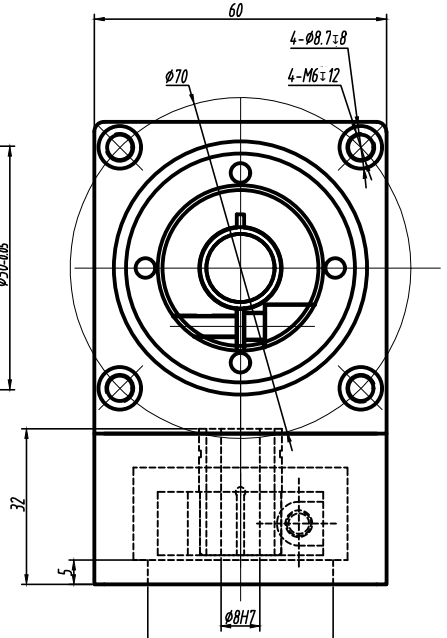



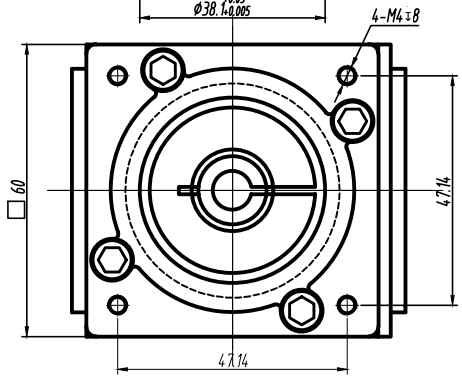

Specifications					
Rated torque	Nm	(A)	Rated speed	rpm	2000
Max. torque	Nm	2x	Max. speed	rpm	3000
Backlash	arcmin	P0≤1 P1≤3 P2≤5	Ambient temp.	°C	-20～+90
Radial load	N	560	Lubrication	Lup	Long-life
Axial load	N	230	IP rating	PC	IP65
Inertia	$Kg.cm^2$	0.08	Mounting	MP	Any position
Efficiency		97	Weight	Kg	1.25
Service life	h	⩾20000	Noise	Db	⩽62

Ratio ( )	Model	Rated torque A)
	PVFGB060-L1-2	35
	PVFGB060-L1-3	30
	PVFGB060-L1-5	25

ANDANTEX

RIGHT-ANGLE GEARBOX

PVFGB060

PVFG060-L1-()-P()

Outline dimensions | Units: mm | Scale: 1:1 | Sheet: 1/1