


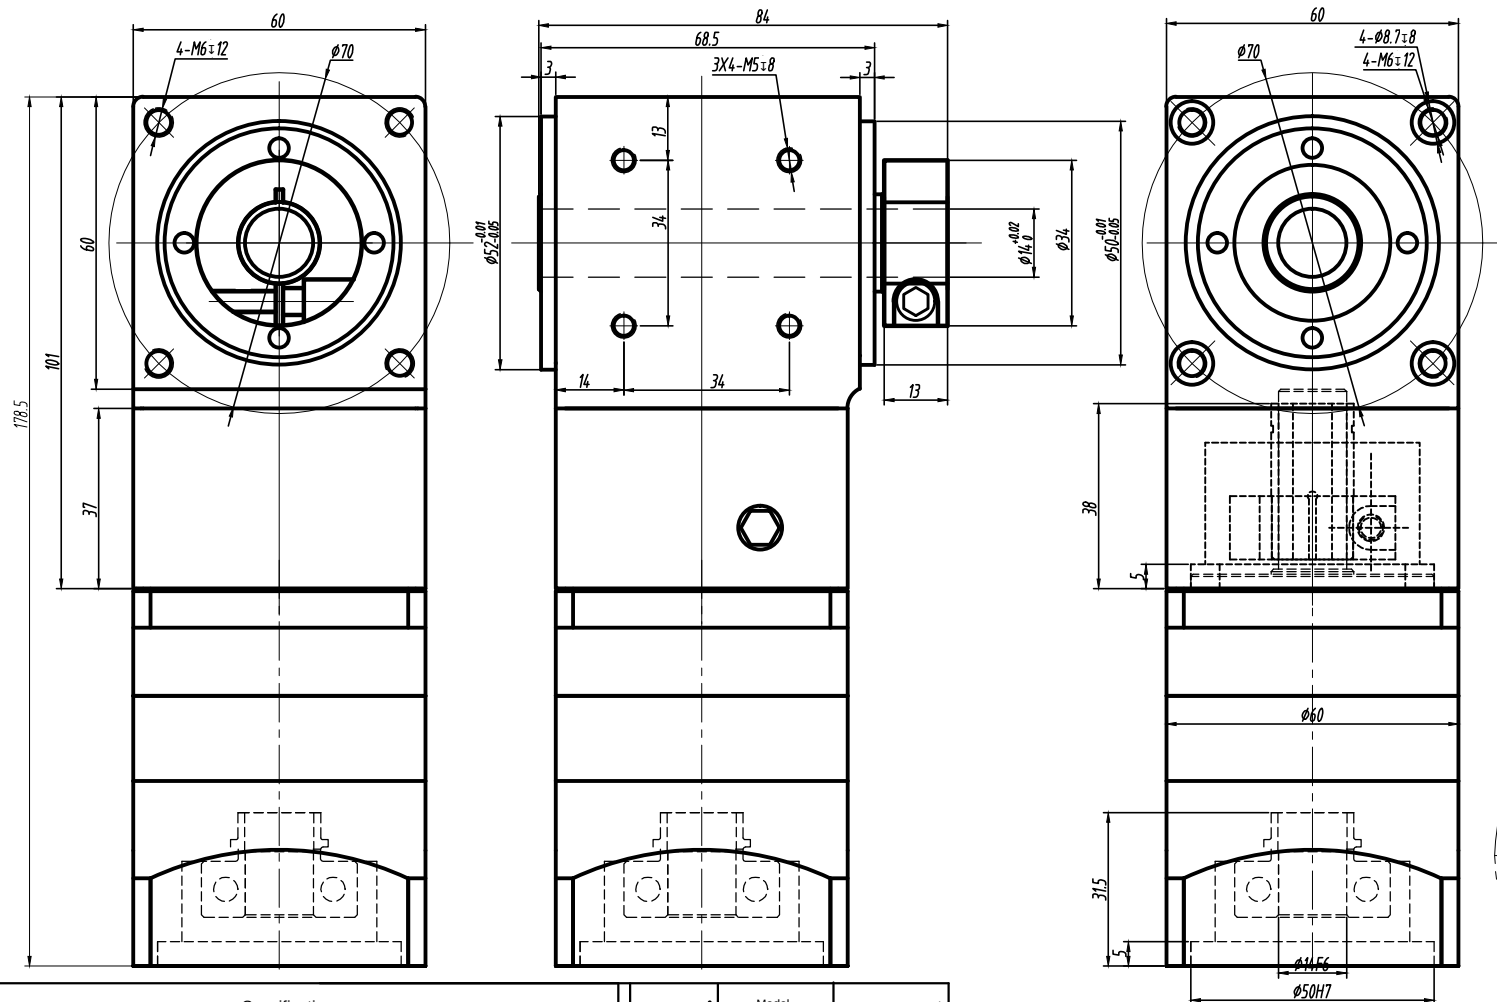

Specifications						Ratio () *	Model	Rated torque A)
Rated torque	Nm	(A)	Rated speed	rpm	2000		PVFG060-L2-10	35
Max. torque	Nm	2x	Max. speed	rpm	3000		PVFG060-L2-12	30
Backlash	arcmin	P0≤3 P1≤5 P2≤8	Ambient temp.	° C	-20~+90		PVFG060-L2-15	30
Radial load	N	560	Lubrication	Lup	Long-life		PVFG060-L2-20	35
Axial load	N	230	IP rating	PC	IP65		PVFG060-L2-25	25
Inertia	Kg. cm ²	0.08	Mounting	MP	Any position		PVFG060-L2-30	30
Efficiency		95	Weight	Kg	2.27		PVFG060-L2-35	30
Service life	h	≥20000	Noise	Db	≤62		PVFG060-L2-50	25

ANDANTEX	RIGHT-ANGLE GEARBOX
PVFG060	PVFG060-L2-()-P()
Outline dimensions Units: mm Scale: 1:1 Sheet: 1/1	