


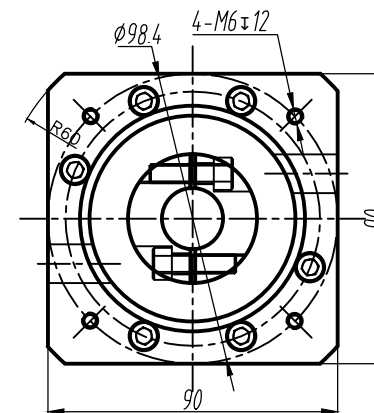

Specifications						Ratio ()	Model	Rated torque A
Rated torque	Nm	(A)	Rated speed	rpm	2000		PVFGB090-L3-40	60
Max. torque	Nm	2x	Max. speed	rpm	3000		PVFGB090-L3-50	60
Backlash	arcmin	$P0 \leq 3$ $P1 \leq 5$ $P2 \leq 8$	Ambient temp.	° C	-20~+90		PVFGB090-L3-60	55
Radial load	N	1050	Lubrication	Lup	Long-life		PVFGB090-L3-70	60
Axial load	N	550	IP rating	PC	IP65		PVFGB090-L3-75	55
Inertia	Kg. cm ²	0.08	Mounting	MP	Any position		PVFGB090-L3-100	60
Efficiency		95	Weight	Kg	6.68		PVFGB090-L3-120	55
Service life	h	≥20000	Noise	Db	≤62		PVFGB090-L3-150	55

ANDANTE	RIGHT-ANGLE GEARBOX
PVFG090	PVFG090-L3-()-P()
Outline dimensions Units: mm Scale: 1:1 Sheet: 1/1	