


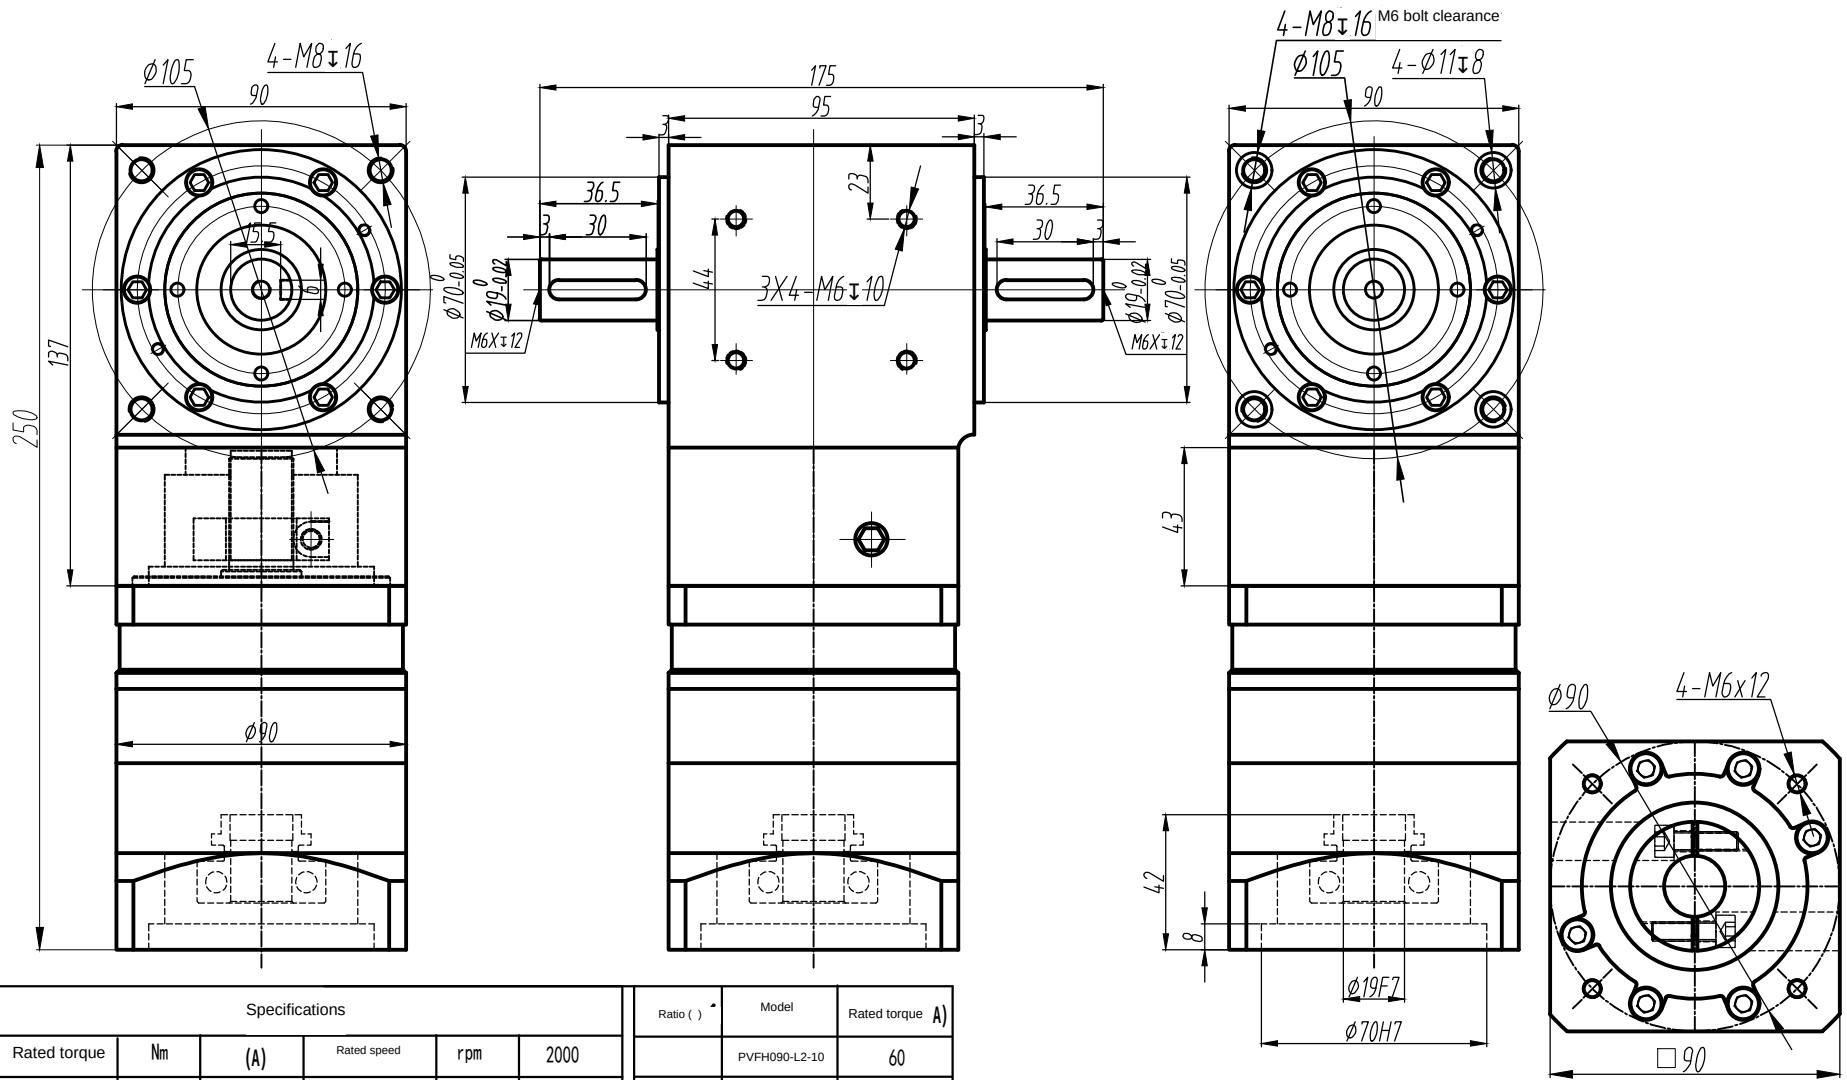

Specifications						Ratio () *	Model	Rated torque A)
Rated torque	Nm	(A)	Rated speed	rpm	2000		PVFH090-L2-10	60
Max. torque	Nm	2x	Max. speed	rpm	3000		PVFH090-L2-12	55
Backlash	arcmin	$P0 \leq 3$ $P1 \leq 5$ $P2 \leq 8$	Ambient temp.	° C	-20~+90		PVFH090-L2-15	55
Radial load	N	1050	Lubrication	Lup	Long-life		PVFH090-L2-20	60
Axial load	N	550	IP rating	PC	IP65		PVFH090-L2-25	50
Inertia	Kg. cm ²	0.08	Mounting	MP	Any position		PVFH090-L2-30	55
Efficiency		95	Weight	Kg	6.68		PVFH090-L2-35	55
Service life	h	≥ 20000	Noise	Db	≤ 62		PVFH090-L2-50	50

ANDANTE	RIGHT-ANGLE GEARBOX
PVFH090	PVFH090-L2-()-P()
Outline dimensions Units: mm Scale: 1:1 Sheet: 1/1	