


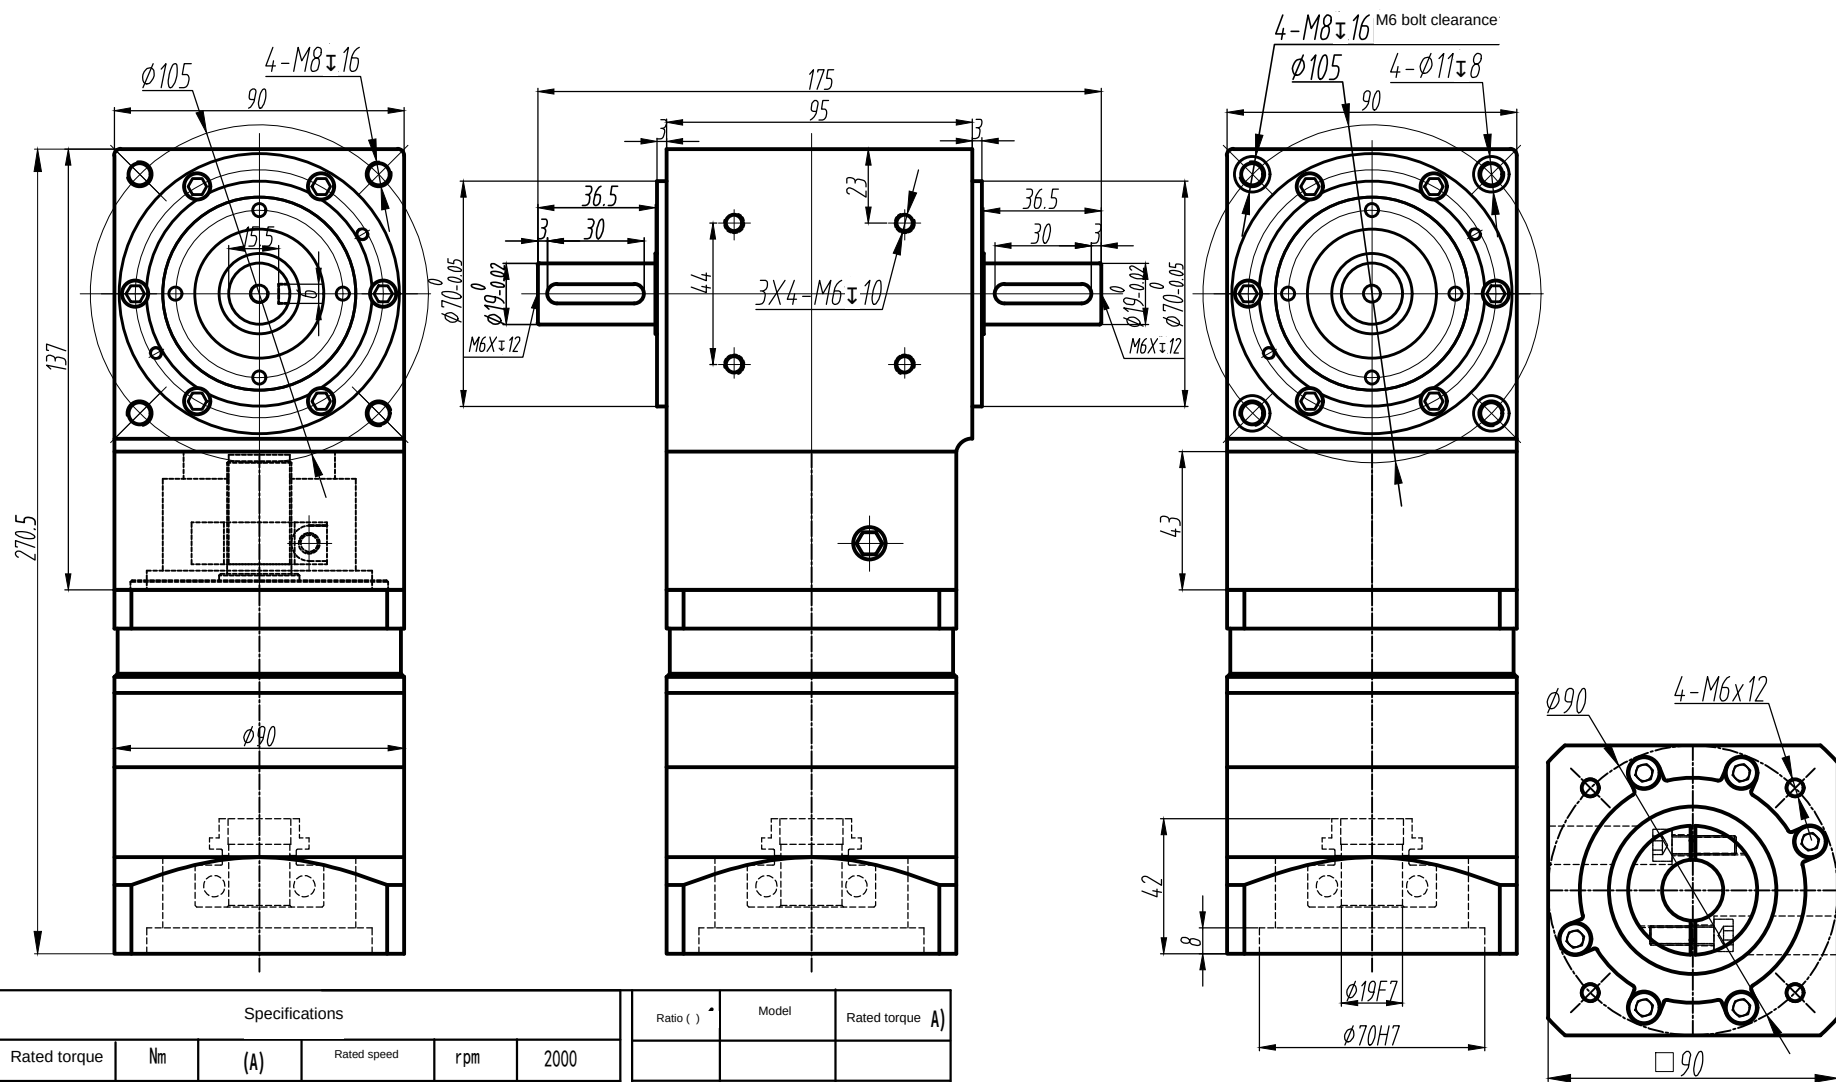

Specifications						Ratio () *	Model	Rated torque A)
Rated torque	Nm	(A)	Rated speed	rpm	2000			
Max. torque	Nm	2x	Max. speed	rpm	3000			
Backlash	arcmin	$P0 \leq 3$ $P1 \leq 5$ $P2 \leq 8$	Ambient temp.	° C	-20~+90			
Radial load	N	1050	Lubrication	Lup	Long-life			
Axial load	N	550	IP rating	PC	IP65			
Inertia	Kg. cm ²	0.08	Mounting	MP	Any position			
Efficiency		95	Weight	Kg	8.68			
Service life	h	≥ 20000	Noise	Db	≤ 62			

ANDANTE	RIGHT-ANGLE GEARBOX
PVFH090	PVFH090-L3-()-P0
Outline dimensions Units: mm Scale: 1:1 Sheet: 1/1	